



21W/30W Downlight

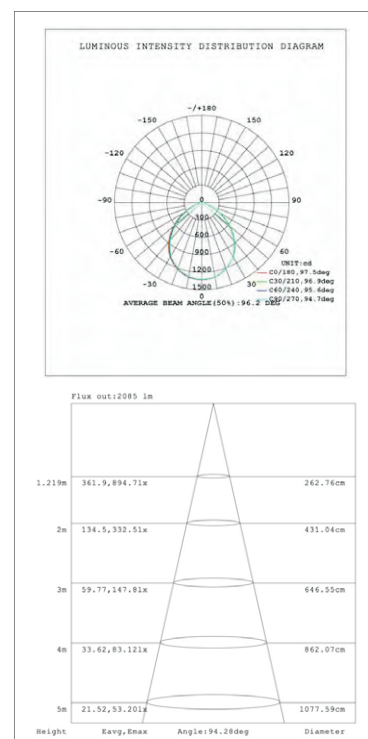

Shielding angle: 17°

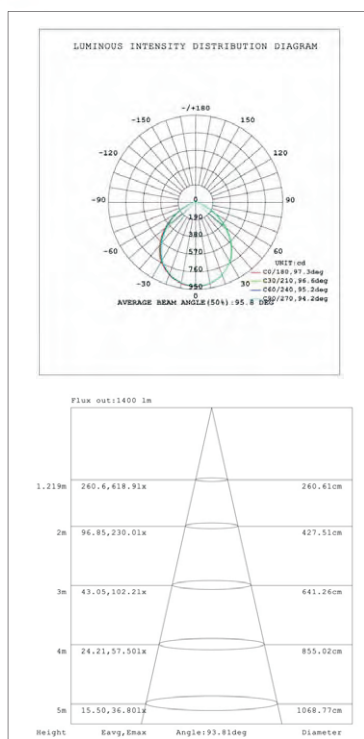

Item number:

Size:

LED type:

Voltage:

PF:

CRI:

CCT:

Luminous flux:

Luminous efficiency:

Material:

UGR-0821

Φ217×H110 mm

SMD 3030

AC220-240V

0.9

80Ra

3000K/4000K/5700K/6500K

1890/1995/2100/2100 lm

90/95/100/100 lm/W

PC+Al

21W

IP20

95°

CE

RoHS

UGR-0830

Φ217×H110 mm

SMD 3030

AC220-240V

0.9

80Ra

3000K/4000K/5700K/6500K

2700/2850/3000/3000 lm

90/95/100/100 lm/W

PC+Al

30W

IP20

95°


CE

RoHS



Low Wattage Downlight

Item number: CPA-10009
Size: $\Phi 100 \times H 80$ mm
LED type: COB
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K/6500K
Luminous flux: 630/675/765 lm
Luminous efficiency: 70/75/85 lm/W
Material: Aluminum+PC

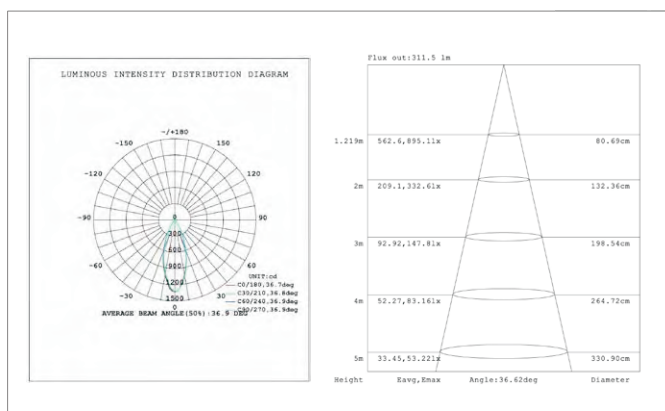


9W

IP20


36°

CE

RoHS



Item number: CPA-14015
Size: $\Phi 140 \times H 100$ mm
LED type: COB
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K/6000K
Luminous flux: 1125/1200/1350 lm
Luminous efficiency: 75/80/90 lm/W
Material: Aluminum+PC

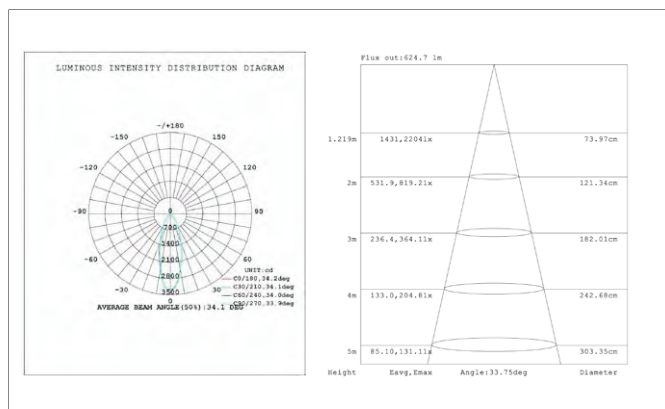

15W

IP20

36°

CE

RoHS

