

COB Downlight (5W/7W/9W/25W/35W)

Integrated driver with strain relief;
quick and easy to install.

Self-designed radiator with
high efficiency to ensure
COB work in low temperature.

Rotatable 358° horizontally
and 30° vertically, meet any
lighting angle requirement.


30°

358°





High light efficiency Epistar
chip, 120lm/W UGR<19









Model number	CCT	Light output CRI ($\pm 10\%$ lm)	
AIL3-005-AW-W-01	5000K	370	>80
AIL3-005-AW-NW-01	4000K	400	>80
AIL3-005-AW-WW-01	3000K	380	>80
AIL3-007-AW-W-01	5000K	510	>80
AIL3-007-AW-NW-01	4000K	570	>80
AIL3-007-AW-WW-01	3000K	500	>80
AIL3-009-AW-W-01	5000K	780	>80
AIL3-009-AW-NW-01	4000K	830	>80
AIL3-009-AW-WW-01	3000K	750	>80

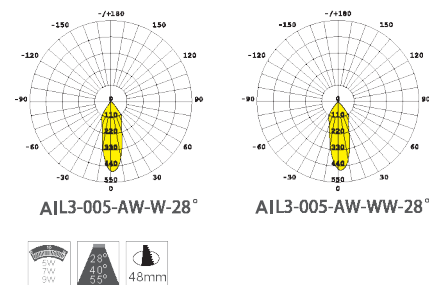

Model number	CCT	Light output CRI ($\pm 10\%$ lm)	
AIL6-025-AW-W-01	5000K	2130	>80
AIL6-025-AW-NW-01	4000K	2050	>80
AIL6-025-AW-WW-01	3000K	2040	>80

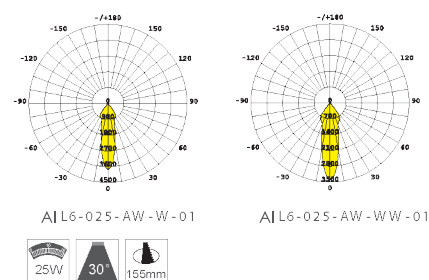

Model number	CCT	Light output CRI ($\pm 10\%$ lm)	
AIL8-035-AW-W-01	5000K	4360	>80
AIL8-035-AW-NW-01	4000K	4300	>80
AIL8-035-AW-WW-01	3000K	4200	>80

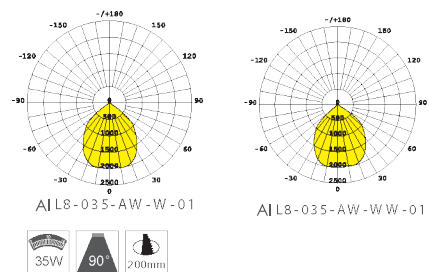

Model number	CCT	Light output CRI ($\pm 10\%$ lm)	
AIP16-005-AW-W-01	5000K	370	>80
AIP16-005-AW-NW-01	4000K	400	>80
AIP16-005-AW-WW-01	3000K	380	>80
AIP16-007-AW-W-01	5000K	510	>80
AIP16-007-AW-NW-01	4000K	570	>80
AIP16-007-AW-WW-01	3000K	500	>80
AIP16-009-AW-W-01	5000K	780	>80
AIP16-009-AW-NW-01	4000K	830	>80
AIP16-009-AW-WW-01	3000K	750	>80

