

Canopy Light


Up to 50% more energy efficient than fluorescent light,
and 50% more energy efficiency than HID luminaries

anti-explosion structure,
can be used in harsh environment.

Bridgelux chip
IP67 design
Suitable for outdoor
and indoor use.

HLG Meanwell power supply
5 years warranty


UL certified



simply hook and hang




adjustable wall/ceiling mount




embedded installation

Size:(mm) 40W

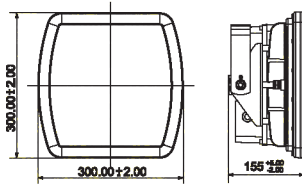

Model number	CCT	Light output (±10%)lm	CRI
AI -040-AW-W-01	5700-6500K	3750	>70
AI -040-AW-NW-01	4000-4500K	3620	>70
AI -040-AW-WW-01	2700-3200K	2800	>70

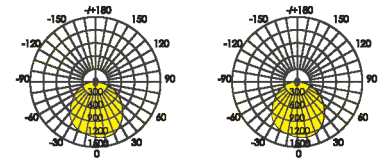


CNP-040-AW-W-01

CNP-040-AW-NW-01




CNP-040-AW-WW-01

Size:(mm) 60W



Model number	CCT	Light output (±10%)lm	CRI
AI -060-AW-W-01	5700-6500K	5750	>70
AI -060-AW-NW-01	4000-4500K	5400	>70
AI -060-AW-WW-01	2700-3200K	5030	>70

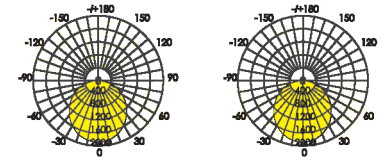


AI -060-AW-W-01

AI -060-AW-NW-01




AI -060-AW-WW-01

Size:(mm) 80W




Model number	CCT	Light output (±10%)lm	CRI
AI -080-AW-W-01	5700-6500K	7930	>70
AI -080-AW-NW-01	4000-4500K	6880	>70
AI -080-AW-WW-01	2700-3200K	6440	>70

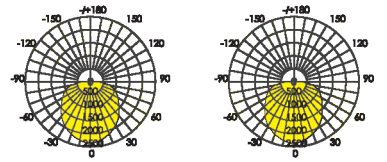


AI -080-AW-W-01

AI -080-AW-NW-01




AI -080-AW-WW-01

Size:(mm) 120W




Model number	CCT	Light output (±10%)lm	CRI
AI -120-AW-W-01	5700-6500K	11720	>70
AI -120-AW-NW-01	4000-4500K	11070	>70
AI -120-AW-WW-01	2700-3200K	10270	>70

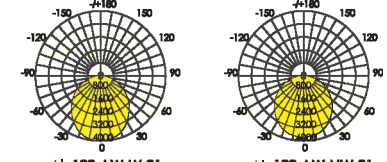

AI -120-AW-W-01

AI -120-AW-NW-01



AI -120-AW-WW-01