


Downlight LED



- Led downlight for false ceiling
- Die casting aluminium body
- High emission flux for shops and shopping centres
- High energy saving
- Driver included
- Long life
- No maintenance



IP20




(COD)	Color	(V)	(W)	(LM)	(K)	(Ø)	(H)	(Ømm)	LEDs	(lm/W)	PFC	Ra
570000.00A*	White	220-240	24	1600	3000	196	63	170	COB	15000	>0,9	>80
570001.00A*	White	220-240	40	3500	3000	226	110	205	SMD5630	15000	>0,9	>80
570002.00A*	White	220-240	68	5500	3000	280	132	254	SMD5630	15000	>0,9	>80

* disponibile a richiesta 3000 e 6000K

* available on demand 3000 and 6000K

LED Lamp

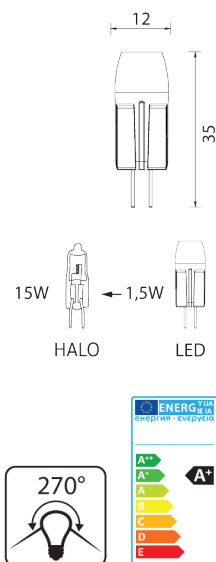

- High CRI
- Operation Temperature: -20°C~+50°C
- Fixture Material: Thermo plastic polimer + glass frosted cover
- Fast start time, instant light
- High efficiency
- Long lasting stability



						CRI	Beam	LED			start time	warm up
700039.00A	1,5	G4	100	12VDC/AC	3000	>80	270°	5x3030	10	>8000	0,6	Ø