

## Economical 2 x 2 LED Panel Light



Less cost of maintenance,  
Easy to install or replace  
fluorescent tubes.



40%~50% energy saving  
effect by SMD LED





30,000 hours life time

# Economical 2 x 2 LED Panel Light

Industrial Area / Office Building / Ground Floor / Calculation surface 1 / Isolines /Horizontal illuminance


## Calculation surface 1 / Isolines/Horizontal illuminance

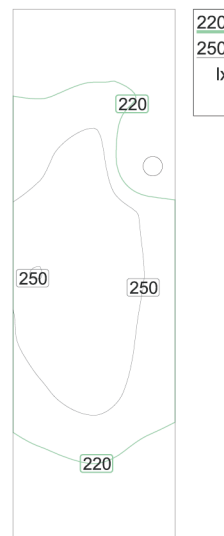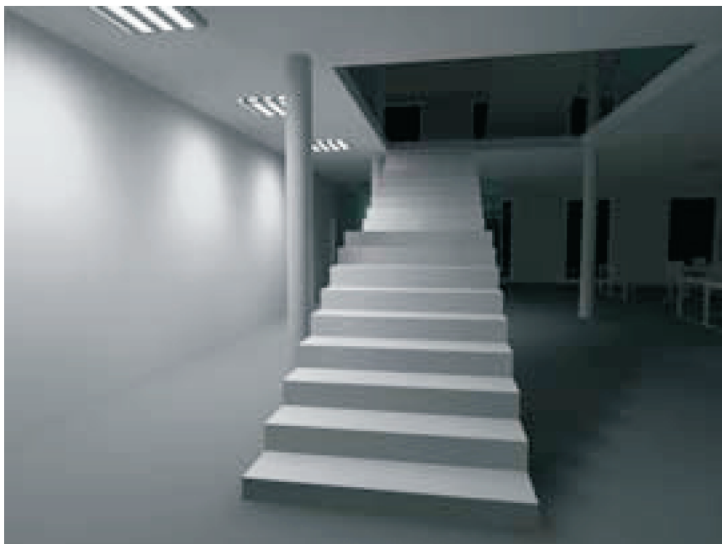

Scale: 1 : 50  
 Horizontal illuminance (Grid)  
 Average: 226 lx, Min: 148 lx, Max: 268 lx, Min/average: 0.655, Min/max: 0.552, Points: 3 x 9 (Relevant: all)

Industrial Area / Office Building / Ground Floor / Calculation surface 2 / Isolines /Horizontal illuminance

## Calculation surface 2 / Isolines/Horizontal illuminance

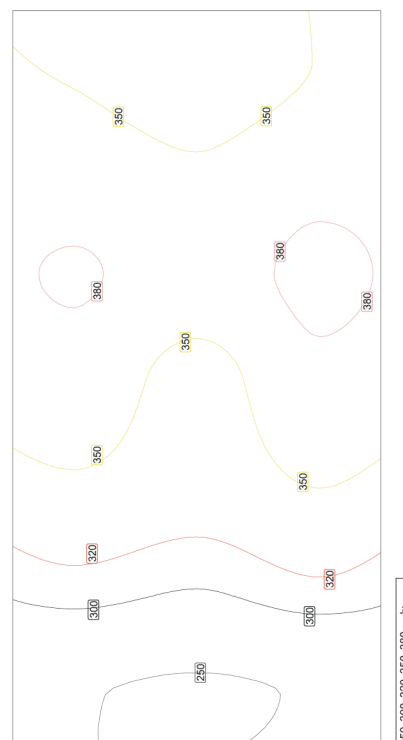

Scale: 1 : 10  
 Horizontal illuminance (Grid)  
 Average: 336 lx, Min: 245 lx, Max: 385 lx, Min/average: 0.729, Min/max: 0.636, Points: 7 x 3 (Relevant: all)