


Compact Fluorescent Lamp Integrated






- Compact decorative energy-saving lamp in the shape of the classic standard Candle
- Ideal for lampshades, chandeliers
- Excellent visual effect Large flow stability Low mercury content < 2.5mg

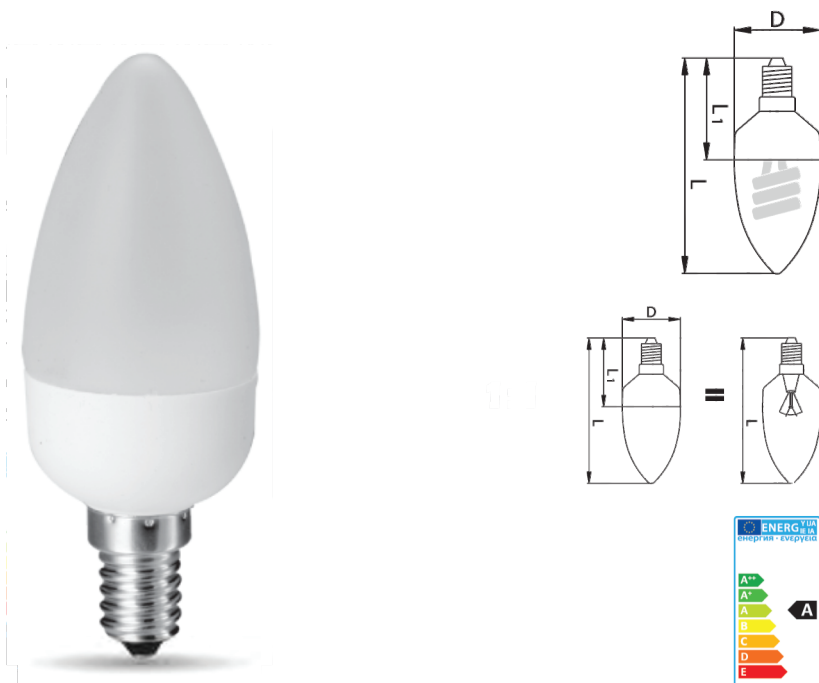

(COD)	(W)	(V)	(E14)	(LM)	(K)	(D)	(L)	(H)	tubo	start time	(ON/OFF)	warming up time (s)	rated current (mA)
100049.00A	7	220-240	E14	286	2700K	36	101	50	7(SPIRAL)	1	31000	90	55
100079.00A	7	220-240	E14	286	6500K	38	120	50	7(SPIRAL)	0.9	31000	90	90
100050.00A	9	220-240	E14	430	2700K	38	107	50	7(SPIRAL)	1	31000	90	70
100080.00A	9	220-240	E14	430	6500K	38	120	50	7(SPIRAL)	0.9	31000	90	90
100048.00A	11	220-240	E14	550	2700K	38	120	50	7(SPIRAL)	0.9	31000	90	90
100084.00A	11	220-240	E14	550	6500K	38	120	50	7(SPIRAL)	0.9	31000	90	90

LED Lamp



- High CRI
- Operation Temperature: -20°C~+50°C
- Fixture Material: Thermo plastic polimer + glass frosted cover
- Fast start time, instant light
- High efficiency
- Long lasting stability
- Frequency 50/60Hz



COD	W		LM	V	K	CRI	Beam	LED		ON OFF	start time	warm up
700006.00A	2,5	G9	200	220-240	3000	>80	270°	5x3030	10	>8000	0,6	Ø
700085.00A	3,5	G9	350	220-240	3000	>80	270°	9x3030	10	>8000	0,6	Ø

new