

2 x 2 LED Panel Light

white housing, RAL9003.
6063 aluminum frame.
super slim 9mm thickness.

3 mm thickness light guide plate,
brand: Mitsubishi from Japan.
PC diffuser panel with high light
transmittance, 120 degree high temperature resistant.

Use reflective sheeting
and aluminum back
cover to prevent light leaking.




2835 SMD LED chip, high luminous efficacy with reliable quality,
more than 50,000 hours life time.




LED driver : isolated constant current design,
Low heat, and high efficiency up to 85%, PF > 0.95.




Size:(mm) 35W




Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE6060-F35W	5000-6500K	2372	>80
AI-PSC24NE6060-F35W	3700-4500K	2406	>80
AI-PSC24WE6060-F35W	2700-3200K	2190	>80

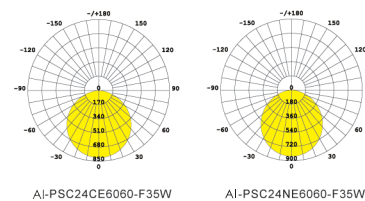

Size:(mm) 45W



Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE6060-F45W	5000-6500K	3019	>80
AI-PSC24NE6060-F45W	3700-4500K	3035	>80
AI-PSC24WE6060-F45W	2700-3200K	3028	>80

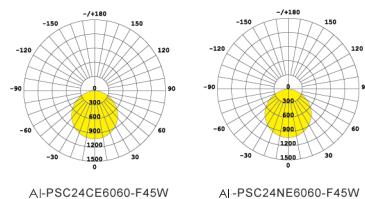

Size:(mm) 55W



Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE6060-F55W	5000-6500K	3974	>80
AI-PSC24NE6060-F55W	3700-4500K	3977	>80
AI-PSC24WE6060-F55W	2700-3200K	4075	>80

