

## 1 x 4 LED Panel Light

white housing, RAL9003.  
6063 aluminum frame.  
super slim 9mm thickness.

3mm thickness light guide plate,  
brand: Mitsubishi from Japan.  
PC diffuser panel with high light  
transmittance, 120 degree high temperature resistant.

Use reflective sheeting  
and aluminum back  
cover to prevent light leaking.




2835 SMD LED chip, high luminous efficacy with reliable quality,  
more than 50,000 hours life time.




LED driver : isolated constant current design,  
Low heat, and high efficiency up to 85%, PF>0.95.

Size:(mm) 35W




Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE3012-F35W	5000-6500K	2407	>80
AI-PSC24NE3012-F35W	3700-4500K	2483	>80
AI-PSC24WE3012-F35W	2700-3200K	2406	>80

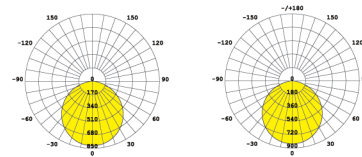


AI-PSC24CE3012-F35W

AI-PSC24NE3012-F35W

Size:(mm) 45W




Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE3012-F45W	5000-6500K	3209	>80
AI-PSC24NE3012-F45W	3700-4500K	3315	>80
AI-PSC24WE3012-F45W	2700-3200K	3066	>80

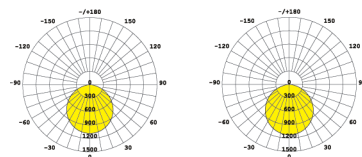


AI-PSC24CE3012-F45W

AI-PSC24NE3012-F45W

Size:(mm) 55W



Model number	CCT	Light output (±10%)lm	CRI
AI-PSC24CE3012-F55W	5000-6500K	3919	>80
AI-PSC24NE3012-F55W	3700-4500K	4021	>80
AI-PSC24WE3012-F55W	2700-3200K	3910	>80

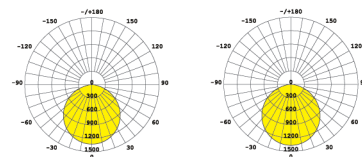

AI-PSC24CE3012-F55W

AI-PSC24NE3012-F55W