

Linear Light



Item number: F6I-1220
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K/5700K/6500K
 Luminous flux: 1800/1900/2000/2000 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC




Item number: F6I-1240
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K//5700K/6500K
 Luminous flux: 3600/3800/4000/4000 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC



Item number: F6I-1243
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K//5700K/6500K
 Luminous flux: 3870/4085/4300/4300 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC



Connectable Light

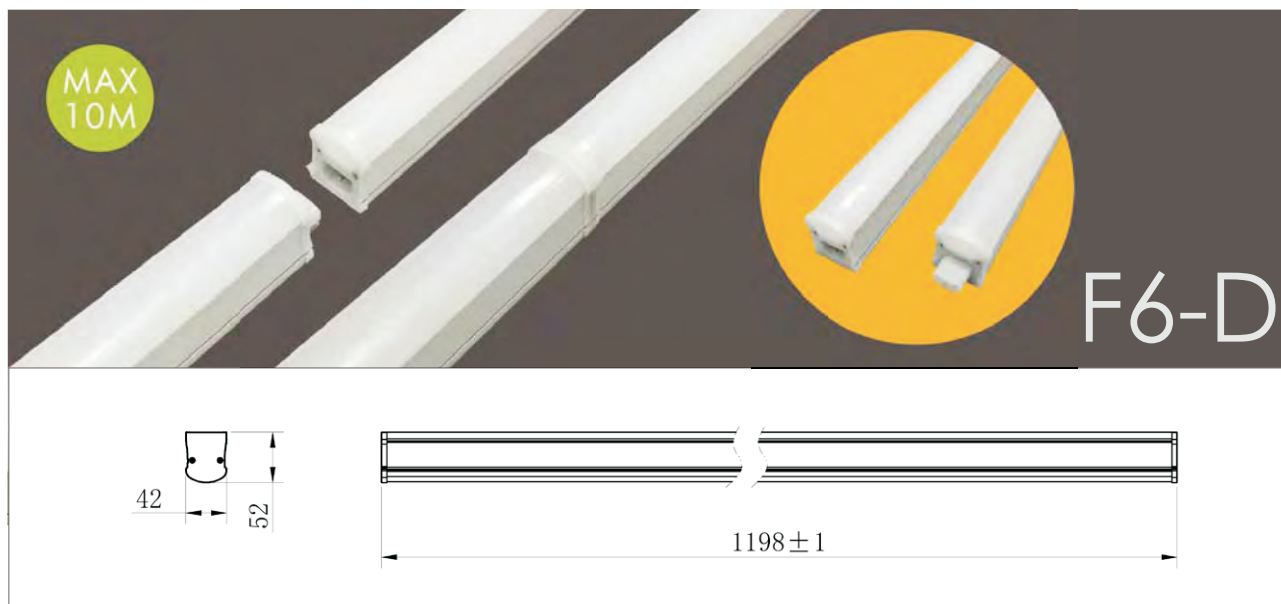

Item number: F6IDM-1220
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K/5700K/6500K
 Luminous flux: 1800/1900/2000/2000 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC



Item number: F6IDM-1240
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K//5700K/6500K
 Luminous flux: 3600/3800/4000/4000 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC



Item number: F6IDM-1243
 Size: 1200(L)x42(W)x52(H) mm
 LED type: SMD 3030
 Voltage: AC220-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K//5700K/6500K
 Luminous flux: 3870/4085/4300/4300 lm
 Luminous efficiency: 90/95/100/100 lm/W
 Material: AL+PC

