





Linear Light

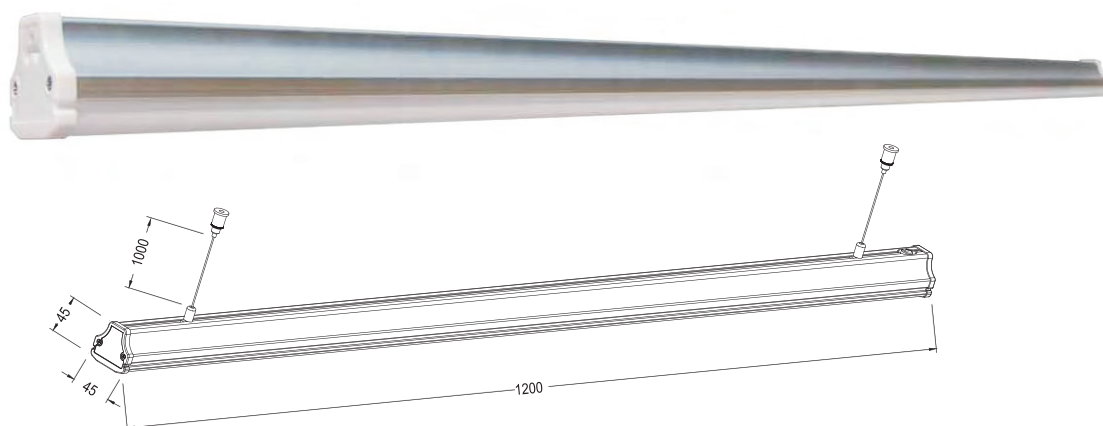

Item number: TXD-N120A5-3
 LED type: 5630
 Voltage: AC100-240V
 PF: 0.9
 CRI: 80Ra
 CCT: 3000K/4000K/6500K
 Luminous flux: 3600/3800/3800 lm
 Luminous efficiency: 90/95/95 lm/W
 Material: AL+PC

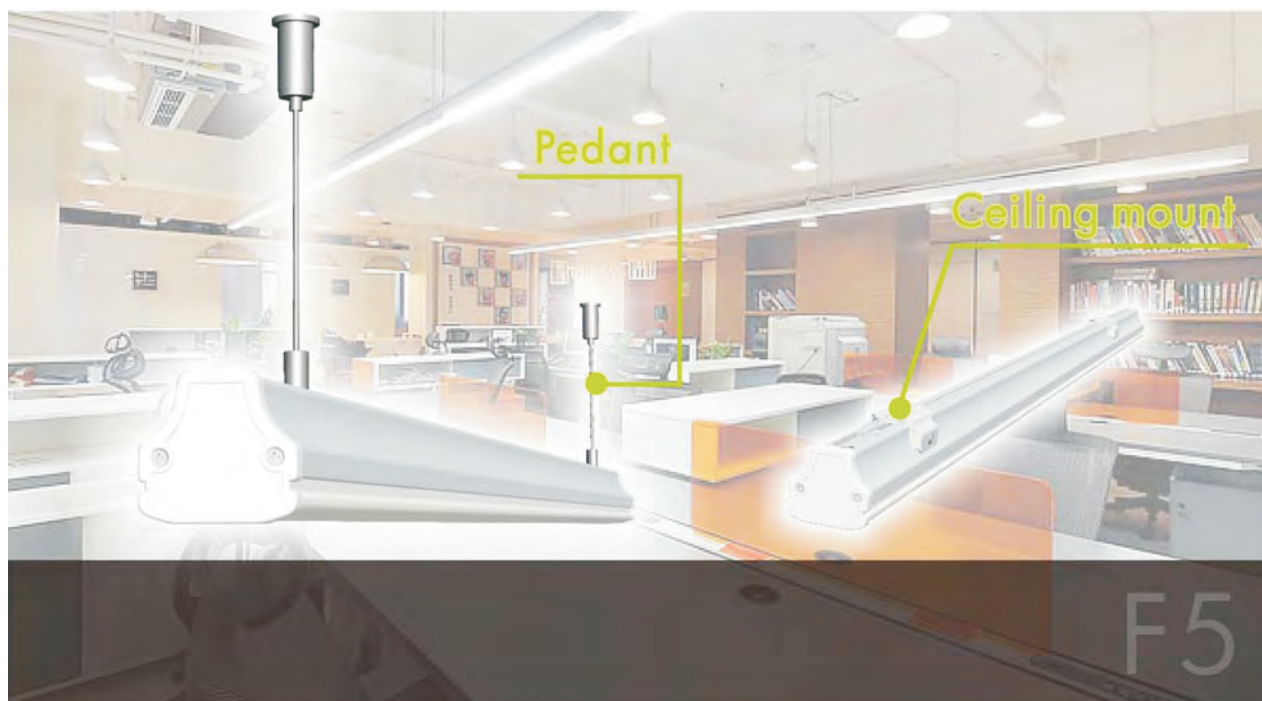



Linear Light

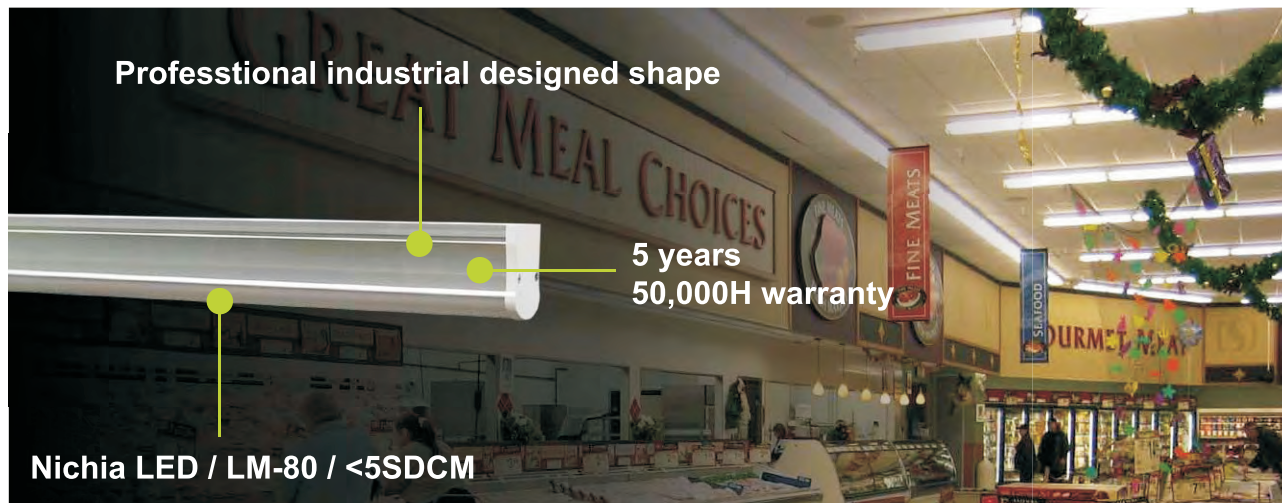

Item number: F6I-0610
Size: 600(L)x42(W)x52(H) mm
LED type: SMD 3030
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K//5700K/6500K
Luminous flux: 900/950/1000/1000 lm
Luminous efficiency: 90/95/100/100 lm/W
Material: AL+PC



Item number: F6I-0620
Size: 600(L)x42(W)x52(H) mm
LED type: SMD 3030
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K//5700K/6500K
Luminous flux: 1800/1900/2000/2000 lm
Luminous efficiency: 90/95/100/100 lm/W
Material: AL+PC

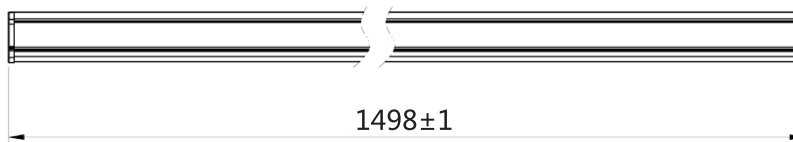

Item number: F6I-1560
Size: 1500(L)x42(W)x52(H) mm
LED type: SMD 3030
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K//5700K/6500K
Luminous flux: 5400/5700/6000/6000 lm
Luminous efficiency: 90/95/100/100 lm/W
Material: AL+PC



Item number: F6I-1580
Size: 1500(L)x42(W)x52(H) mm
LED type: SMD 3030
Voltage: AC220-240V
PF: 0.9
CRI: 80Ra
CCT: 3000K/4000K//5700K/6500K
Luminous flux: 6800/7200/7600/7600 lm
Luminous efficiency: 85/90/95/95 lm/W
Material: AL+PC

