

Outdoor LED Flood Light



Toughened glass of high transmittance (>95%)

Available with Bridgelux or Epistar chip
100lm/w of lamp


Rotatable **355°**

Larger cooling area,
ensure longer lifetime


Waterproof driver IP65




Size (mm) 10W

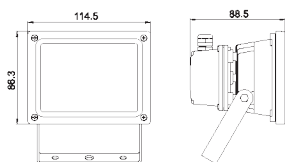


Model number	CCT	Light output CRI (±10%)lm	
AI-010-AW-W-01	5500-7000K	720	>70
AI-010-AW-NW-01	4000-4500K	740	>70
AI-010-AW-WW-01	2700-3200K	660	>70

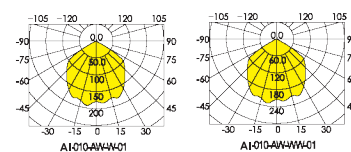


Size (mm) 20W

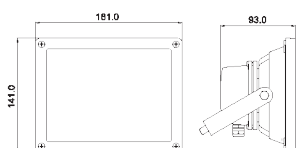


Model number	CCT	Light output CRI (±10%)lm	
AI-020-AW-W-01	5500-7000K	1860	>70
AI-020-AW-NW-01	4000-4500K	1990	>70
AI-020-AW-WW-01	2700-3200K	1770	>70

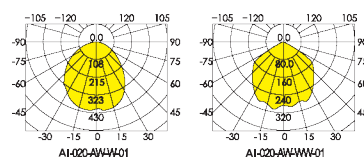


Size (mm) 30W

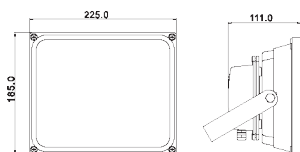

Model number	CCT	Light output CRI (±10%)lm	
AI-030-AW-W-01	5500-7000K	3130	>70
AI-030-AW-NW-01	4000-4500K	3250	>70
AI-030-AW-WW-01	2700-3200K	2660	>70

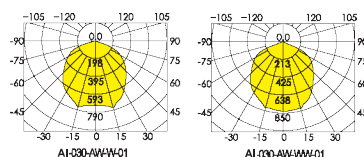

Size (mm) 50W

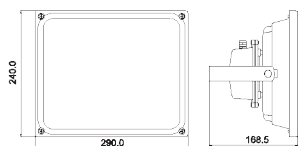

Model number	CCT	Light output CRI (±10%)lm	
AI-050-AW-W-01	5500-7000K	5130	>70
AI-050-AW-NW-01	4000-4500K	4600	>70
AI-050-AW-WW-01	2700-3200K	4270	>70

