

Surface Panel Light (8W/11W/14W)

6063 aluminum, white housing,
RAL9003. With springs for
recessed installation.

Use reflective sheeting and aluminum
back cover to prevent light leaking.

PMMA diffuser panel with
high light transmittance
3mm thickness light guide plate,
brand: Mitsubishi from Japan.




LED: 2835 SMD LED chip, high luminous efficacy with reliable quality,
more than 50,000 hours life time.




LED driver : isolated constant current design, low heat,
and high efficiency up to 85%, PF>0.95




Size:(mm)




Model number	CCT	Light output ($\pm 10\%$)lm	CRI
AI-008-AW-01W-F	5000-6500K	568	>80
AI-008-AW-01NW-F	3700-4500K	536	>80
AI-008-AW-01WW-F	2700-3200K	516	>80

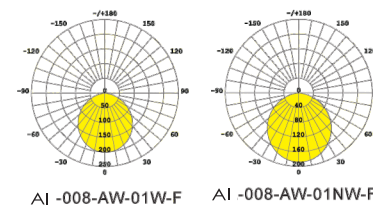


Size:(mm)



Model number	CCT	Light output ($\pm 10\%$)lm	CRI
AI-011-AW-01W-F	5000-6500K	868	>80
AI-011-AW-01NW-F	3700-4500K	903	>80
AI-011-AW-01WW-F	2700-3200K	818	>80

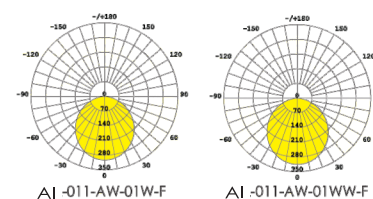

Size:(mm)



Model number	CCT	Light output ($\pm 10\%$)lm	CRI
AI-014-AW-01W-F	5000-6500K	1241	>80
AI-014-AW-01NW-F	3700-4500K	1150	>80
AI-014-AW-01WW-F	2700-3200K	991	>80

